

# The Power of Illumination

[www.bplust.com](http://www.bplust.com)

## Electronic Plug-In Transformer

For Low Voltage Halogen Lamps

This electronic converter offers unmatched performance and reliability.

Smaller and lighter, more efficient and noiseless, compared to conventional transformers; a fireproof plug-in casing safely enclose each CV90027 electronic converter.

The CV90027 electronic converter, certified by CSA and NRTL, is the best offered in low voltage lighting applications.



**Model :CV90027**



### Advantages

- ✓ Perfectly adapted for a total of 20 to 60 Watts halogen lamps ;
- ✓ Built-in radio interference filter and anti-crossover circuit for increased reliability ;
- ✓ Actively protected against short-circuits on 12 Volts output, limited to 8 A and 100 W (Class 2) ;
- ✓ Manufactured with top-of-the line components, it is cooler and safer.
- ✓ The CV90027 electronic converter goes through critical tests to meet very high quality control standards.
- ✓ Our manufacturing facility uses the most sophisticated assembly processes currently available. Computerized automation techniques guarantee end-product similarity, quality, performance and reliability.

**1-800-361-1400**



## General Specifications




- **Input voltage :** 120 VAC 60 Hz
- **Input current :** 0.52 A
- **Output voltage :** 11.6 V
- **Output power :** 20 to 60 Watts
- **Short circuit protection :** YES
- **Class 2 :** YES
- **Power Factor :** >.93
- **RFI filter :** YES
- **THD :** < 20 %
- **Operating frequency :** > 20 KHz
- **Max. case temperature :** 90°C

## Warranty

Warranty is offered and valid only for initial purchaser  
**Subject to our terms and conditions. Consult factory**

## Dimensions

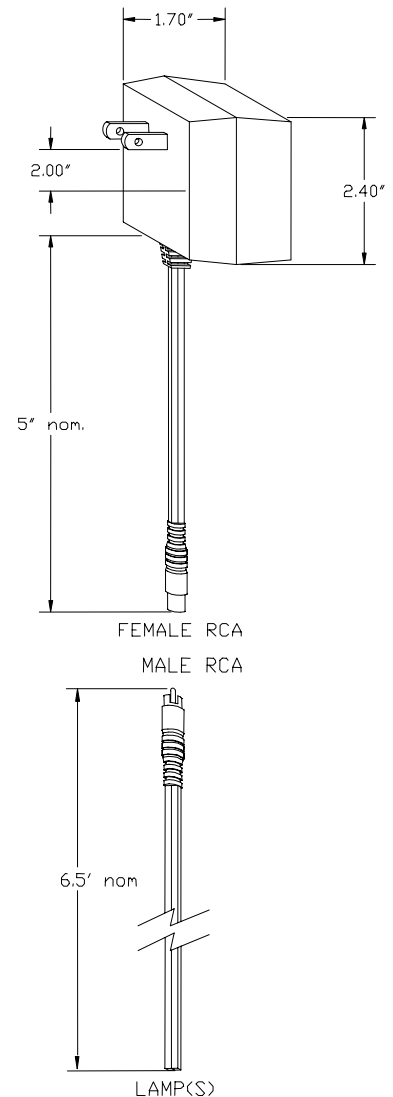

**1400 Bergar  
Laval (Quebec)  
Canada, H7L 5A2  
Tel.: (450) 663-7884  
1-800-361-1400  
Fax.: (450) 663-7638  
[www.bplusl.com](http://www.bplusl.com)  
[info@bplusl.com](mailto:info@bplusl.com)**